



PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re application of

Docket No: CQ10109

Leslie PAINE

Appln. No.: 10/690,753

Group Art Unit: 3722

Confirmation No.: 5368

Examiner: UNKNOWN

Filed: October 21, 2003

For: FASTENING SYSTEM

SUBMISSION OF PRIORITY DOCUMENT

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Sir:

Submitted herewith is a certified copy of the priority document, Great Britain Application No. 0224555.3, on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,

Frank L. Bernstein
Registration No. 31,484

SUGHRUE MION, PLLC
Telephone: (650) 625-8100
Facsimile: (650) 625-8110

MOUNTAIN VIEW OFFICE

23493

CUSTOMER NUMBER

Date: February 6, 2004

Certificate of Mailing

I hereby certify that this correspondence is being deposited with the United States Postal Service with sufficient postage as first class mail in an envelope addressed to:

Commissioner for Patents
P.O. Box 1450
Alexandria, VA 22313-1450

Date: February 6, 2004

Signed: Thea K. Wagner
Thea K. Wagner





PAINE
USSN 10/690,753
Att DKT CQ10109
Filed 10/21/03
1 of 1




INVESTOR IN PEOPLE
The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

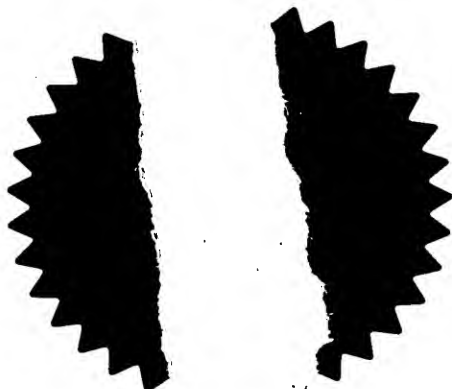

Signed

Dated

22 October 2003



23 OCT 02 17:57:21-1 037371
P01/770 10.00/02245553

Request for grant of a patent ON

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
South Wales
NP10 8QQ

1. Your reference

Super Stud.

2. Patent application number

(The Patent Office will fill in this part)

22 OCT 2002

0224555.3

3. Full name, address and postcode of the or of each applicant (underline all surnames)

LESLIE PAINE
12 MANDELA ST
LONDON SW9 6EL.

Patents ADP number (if you know it)

00001816005.

If the applicant is a corporate body, give the country/state of its incorporation

06326649001

4. Title of the invention

Super Stud Fastening System.

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Patents ADP number (if you know it)

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

No

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form


Description

6

Claim(s)

Abstract

Drawing(s)

3+3 

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (*Patents Form 7/77*)

Request for preliminary examination and search (*Patents Form 9/77*)


Request for substantive examination (*Patents Form 10/77*)

Any other documents
(please specify)

11.

I/~~We~~ request the grant of a patent on the basis of this application.

Signature



Date

22/10/2002

12. Name and daytime telephone number of person to contact in the United Kingdom

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

FASTENING SYSTEM

The present invention relates to a fastening system comprising a stud and a sheet of cover material and is more especially but not exclusively concerned with a fastening system for binding paper stationery or the like that has been pre-punched with round holes.

Binders for paper stationery are well known but suffer from several disadvantages - one disadvantage is that they are sold in a pre-assembled state, and are therefore bulky, and another disadvantage is that the pre-assembly steps are expensive.

Objects of the present invention are to tackle those disadvantages by providing a fastening system, capable of use in binding paper stationery that has been pre-punched with round holes, wherein the fastening system can be sold in a disassembled state but then assembled in a simple and convenient manner by an end user.

According to the present invention, a fastening system comprises a stud and a sheet of cover material;

the stud being formed with a groove, and the sheet of cover material being formed with a hole and two slits, the slits extending away from respective intersections with the hole in respective directions which are not in alignment with one another;

whereby, in use, the stud is pushed through the hole until the groove in the stud snaps into engagement with the hole in the sheet of cover material.

It will be appreciated that a binder can be formed from the combination of one or more of the studs being snapped into engagement with one or more of the sheets of cover material.

Preferably, the sheet of cover material is formed of a plastics material such as polyurethane, polypropylene or polyethylene, but could be formed of paper, card, wood, leather or metal.

5

The deformability of the sheet of cover material, coupled with the spring-back property of the sheet of cover material, creates the ability for the stud to snap into engagement with the sheet of cover material.

10

Preferably, the slits diverge with increasing distance from the hole to form a flap.

Preferably, the slits are tangential to the hole, and the hole has a boundary, with a part of the boundary of the hole which is a continuation of the tangential slits including part of a circle, and with a remaining part of the boundary of the hole forming part of a circle of greater radius than said circle included in said part of the boundary of the hole which is a continuation of the tangential slits.

It is believed that the above-noted configuration of the hole and two slits is particularly effective in gripping the stud. Typically, the part of the boundary of the hole which is a continuation of the tangential slits has a curved base with a radius corresponding to that of the groove in the stud. The remaining part of the boundary of the hole also engages the groove in the stud and thereby firmly holds the stud in position within the hole in the sheet of cover material.

35

Preferably, the stud is of metal and the groove is an annular groove.

More particularly, the stud may be elongate and have an annular groove near each end and the sheet of cover

material may be folded and have said hole and two slits on one side of said fold and have another of said hole and two slits on the other side of said fold whereby, in use, each of the annular grooves snaps into engagement with a
5 respective one of each of the holes.

Preferably, the stud passes through pre-punched holes in paper stationery located between the annular grooves in the stud.

10

The diameter of the stud may be slightly smaller than the diameter of the pre-punched holes in the paper stationery allowing the paper stationery to slip easily over the stud. There are commonly found hole sizes of 6mm,
15 1/4" and 5/16". It would be possible for the stud to have a small diameter barrel over which a sleeve could be introduced to bring the portion of the stud that passes through the paper stationery up to the diameter of larger pre-punched holes.

20

The ends of the stud may be domed to act as lead-ins.

Moreover, the stud may be symmetrical so that either end can be gripped without requiring to be correctly
25 orientated - this can be important when the fastening system is to be assembled post purchase by an end user.

The fastening system may be of use in a number of different binder formats. For example, there may be a one-
30 piece cover formed by folding a single sheet of cover material, with a series of studs of different height being provided to suit the contents of the binder. A fastening system may bind together particular documents which are then further held in a traditional ring binder. Moreover,
35 the fastening system would also be suitable for use in swatch binding where there is a single stud around which the swatch sheets can pivot.

In all of these applications the fastening system may be easily assembled and disassembled at will.

5 A fastening system in accordance with the present invention will now be described in more detail by way of example only with reference to the accompanying drawings in which:-

Figure 1 is a side view of a stud;

10 Figure 2 is a plan view of part of a sheet of cover material;

Figure 3 is a schematic cross-sectional view indicating the interengagement between a stud and part of a sheet of cover material;

15 Figure 4 is a perspective view indicating a stud with a paper sheet having a small diameter pre-punched hole;

Figure 5 is a perspective view indicating a stud with a sleeve allowing use with a paper sheet having a large diameter pre-punched hole;

20 Figure 6 is a plan view showing a binder with two covers and a central foldable sheet of cover material; and

Figure 7 is a perspective view of a fastening system in the form of a swatch binding.

25 A fastening system in accordance with the present invention is shown in the accompanying drawings.

30 More particularly, Figure 1 shows an elongate metal stud 10. The stud 10 has a domed lead-in 12 at each end and has an annular groove 14 near each end. The stud 10 is not only rotationally symmetrical but the ends are mirror images to allow use of either of the annular grooves 14.

35 Figure 2 shows part of a sheet 16 of cover material which has been formed with a hole 18 and two slits 20. The slits 20 extend away from respective intersections 22 with the hole 18 in respective directions which are not in alignment with one another. The slits 20 diverge with

increasing distance from the hole 18. The slits 20 are tangential to the hole 18 with a part 24 of the boundary of the hole 18 including part of a circle. The part 24 of the boundary of the hole 18 is a continuation of the tangential
5 slits 20. A remaining part 26 of the boundary of the hole 18 forms part of a circle of greater radius than said circle included in said part 24 of the boundary of the hole 18.

10 The cover material of the sheet 16 is preferably a plastics material such as polyurethane, polypropylene or polyethylene, but could be formed of paper, card, wood, leather or metal.

15 Figure 3 shows schematically the positions which are adopted by the stud 10 and the sheet 16 after the stud 10 has been brought into snap engagement with the sheet 16.

More particularly, it will be seen that the part 24 of
20 the boundary of the hole 18 lies snugly against the base of one of the grooves 14 in the stud 10. The radial extent of said abutment may be around 160° . The remaining part 26 of the boundary of the hole 18 tangentially touches the diametrically opposed part of the base of the groove 14 of
25 the stud 10.




For ease of flexing, and subsequent snap engagement, the intersections 22 are preferably located just beyond the open outer edge of the groove 14 in the stud 10.

30 It has been found that if the stud 10 is pushed too far through the sheet 16, the remaining part 26 of the boundary of the hole 18 remains in engagement with the groove 14, and the natural tendency of the sheet 16 to
35 return to an undeformed condition pulls the stud 10 back into the intended position of engagement.

In the intended use as a binder with paper stationery, a plurality of paper sheets are located around the central part of the stud 10 between the two annular grooves 14 - Figure 4 shows a paper sheet 30 with a pre-punched hole 32, whereas Figure 5 shows a paper sheet 40 with a pre-punched hole 42 which is of greater diameter than the pre-punched hole 32, the gap which would otherwise have been formed being filled by a sleeve 44.

Although many different applications are possible, two preferred applications will now be illustrated merely by way of example - Figure 6 shows a sheet 50 of cover material with central fold lines 52 as well as a separate front cover 54 and a separate rear cover 56, whereas Figure 7 shows two sheets 60 of cover material with a single stud 62 holding a number of separate swatches 64.

In both of Figures 6 and 7, the fastening system incorporates those as previously described with reference to Figures 1 to 5.

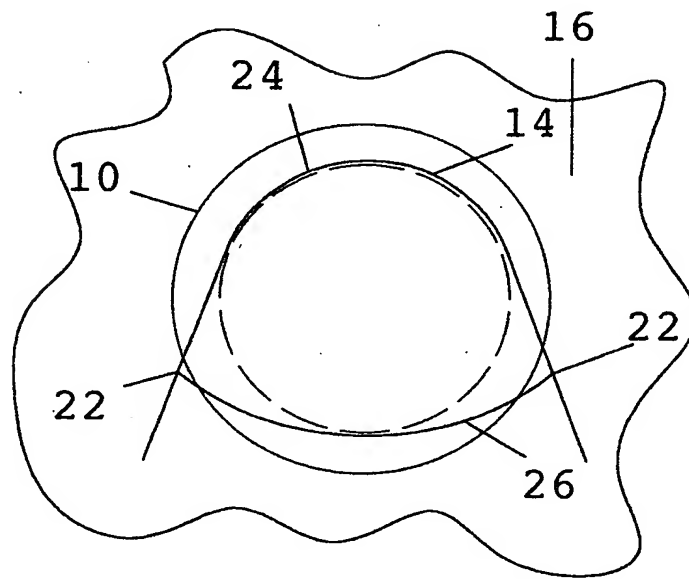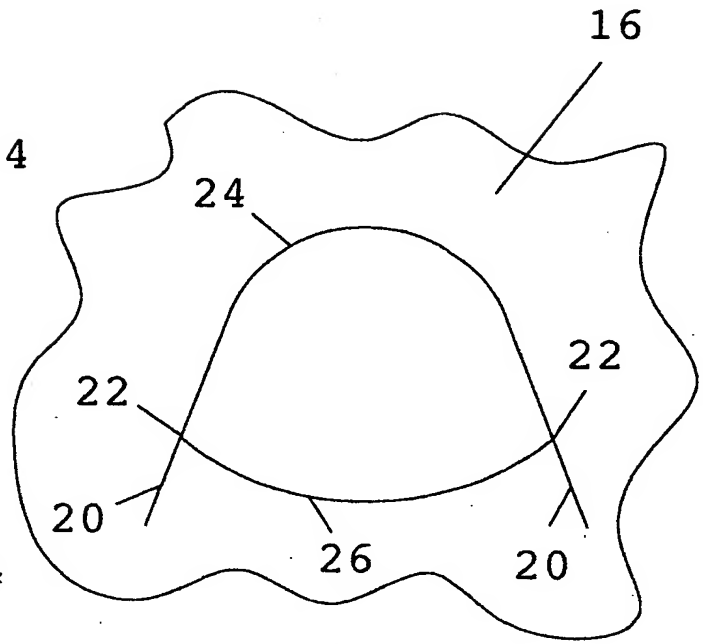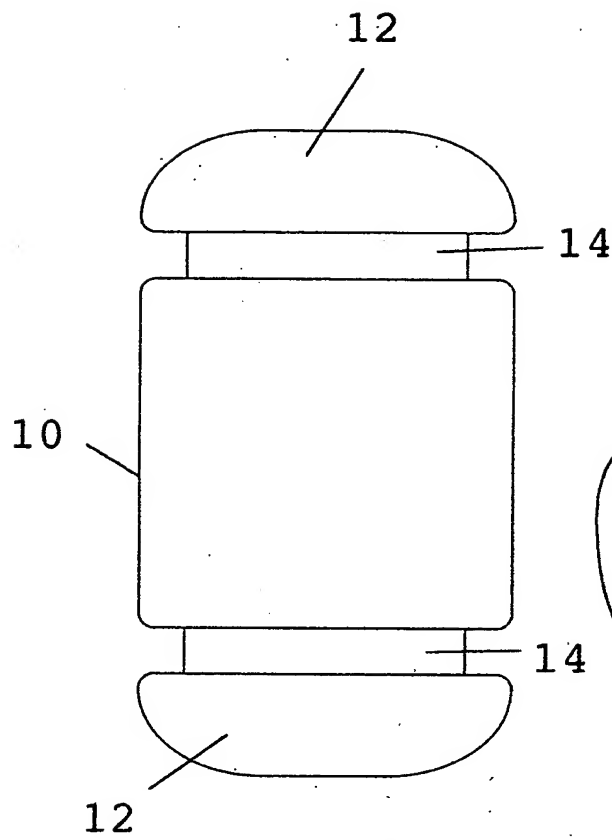

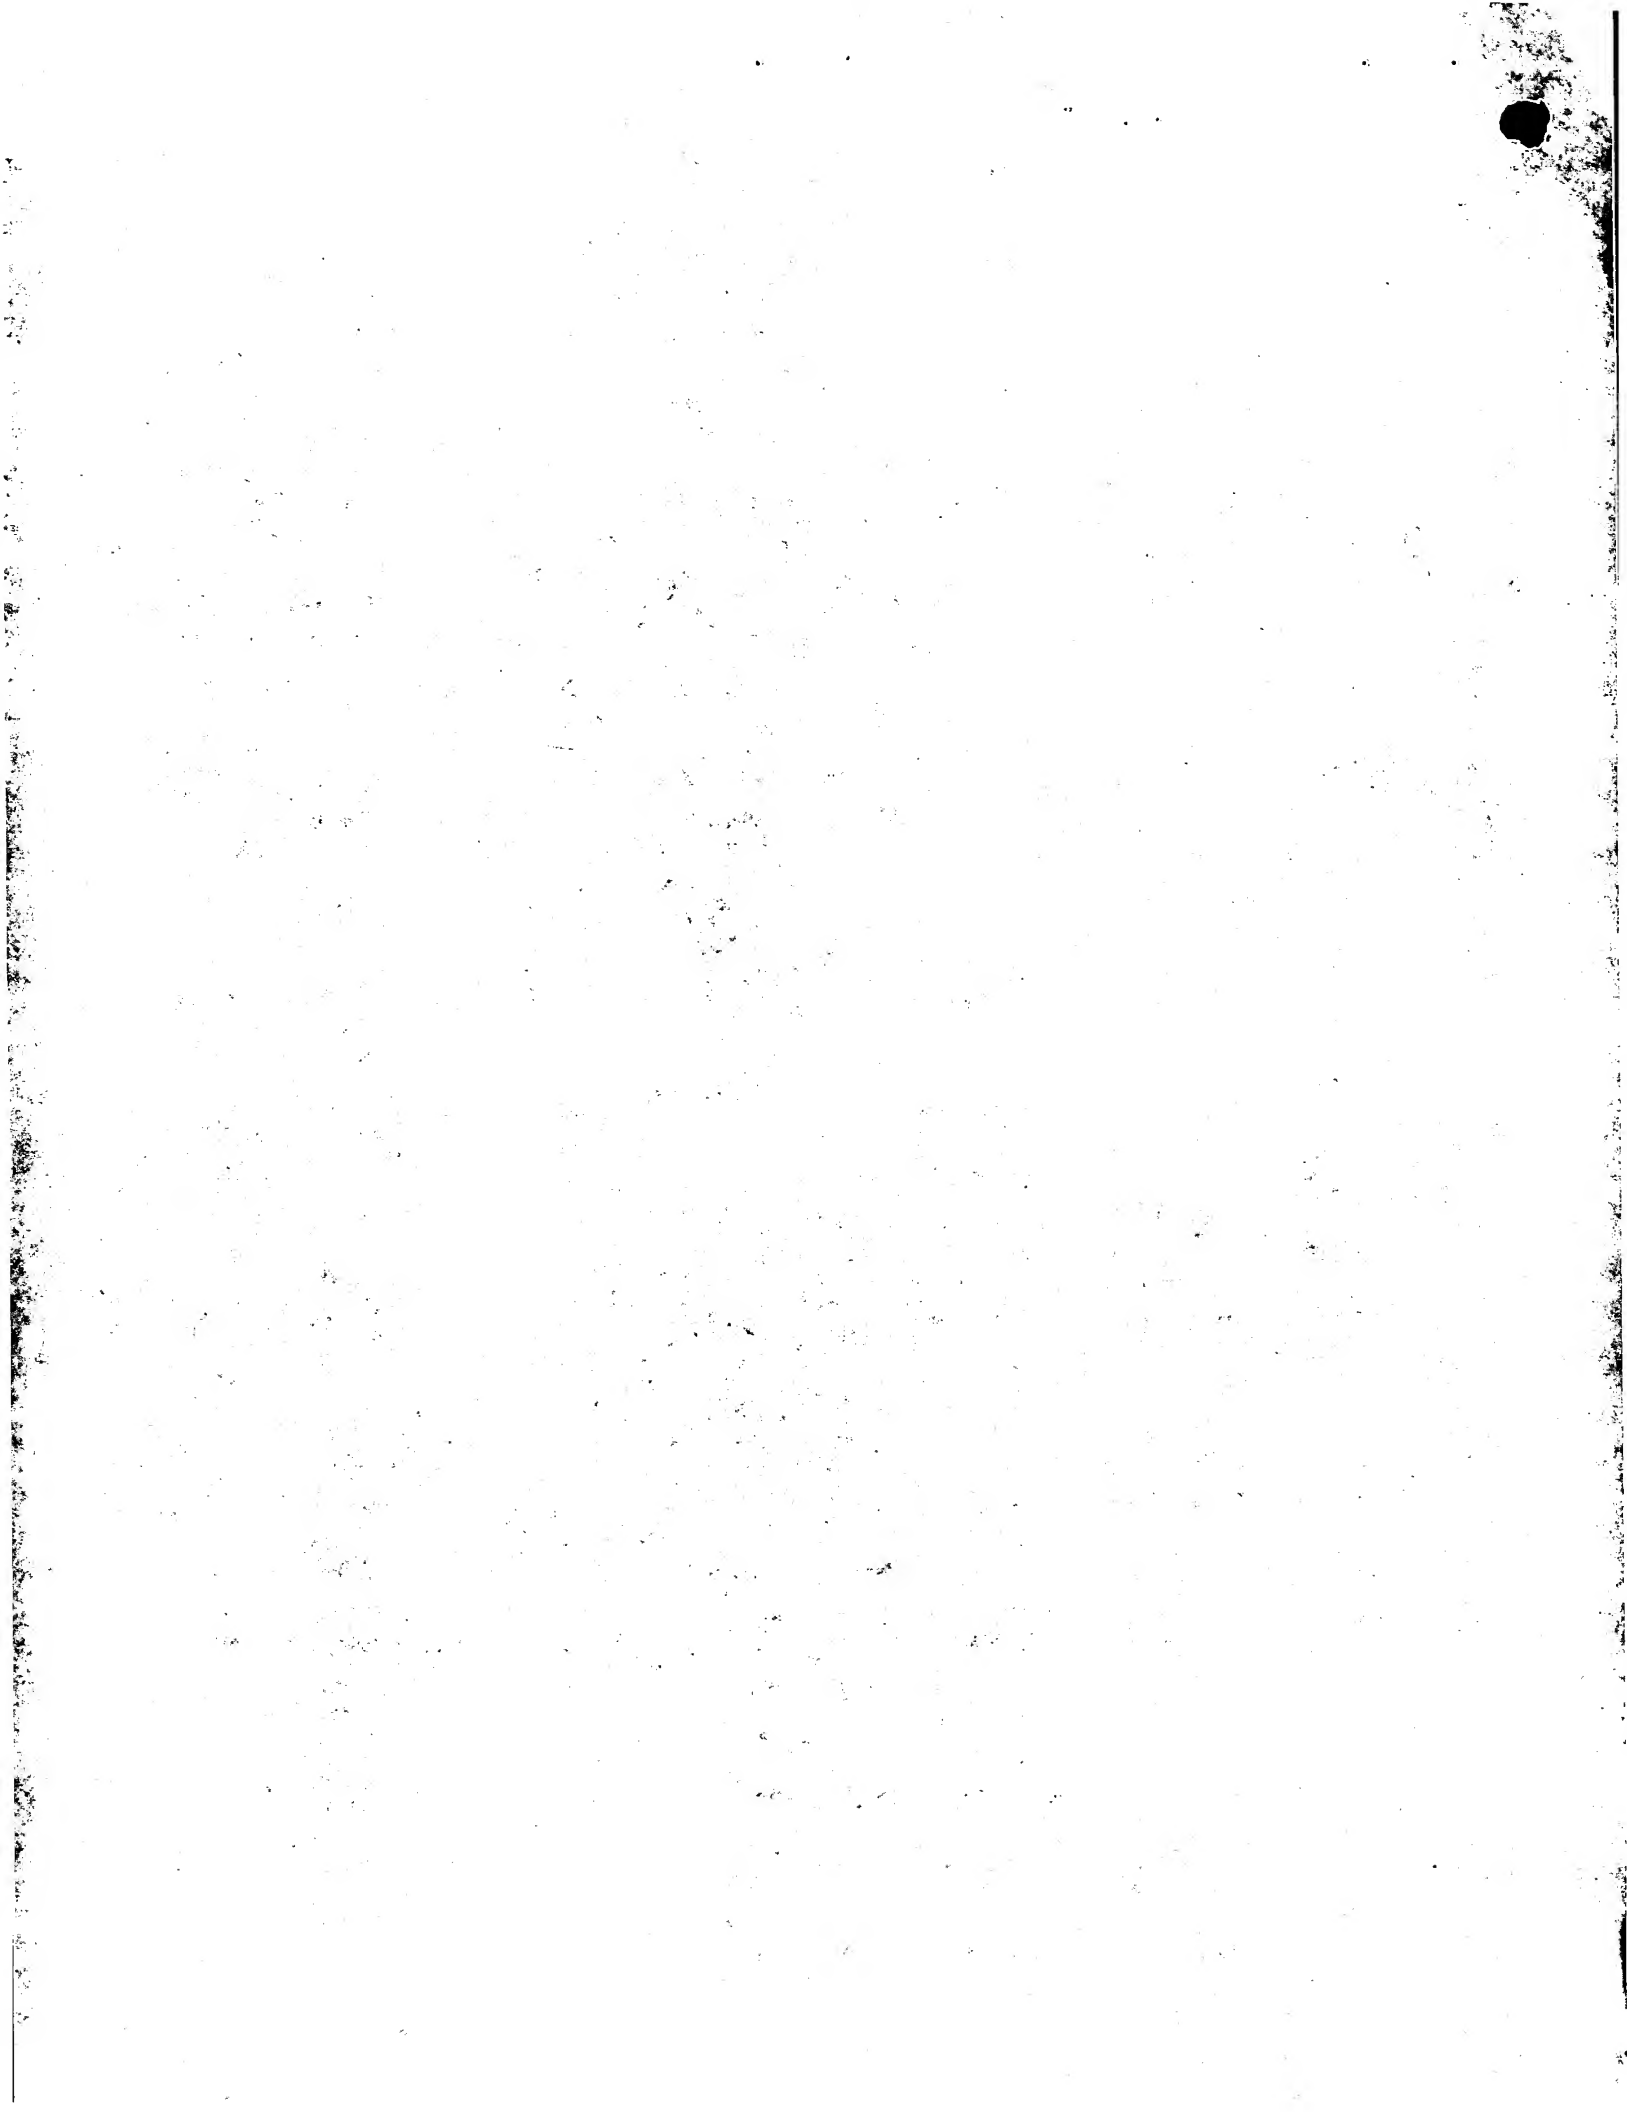


FIG 4


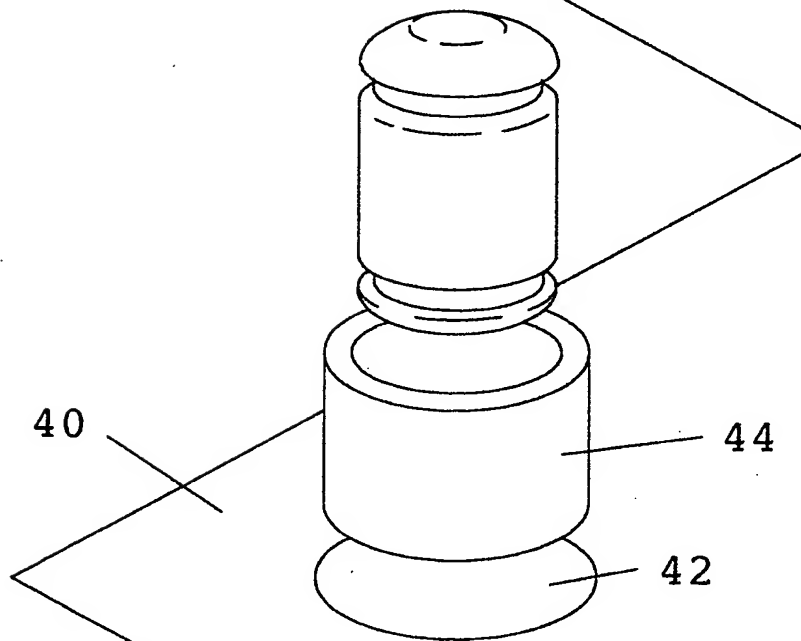


FIG 5

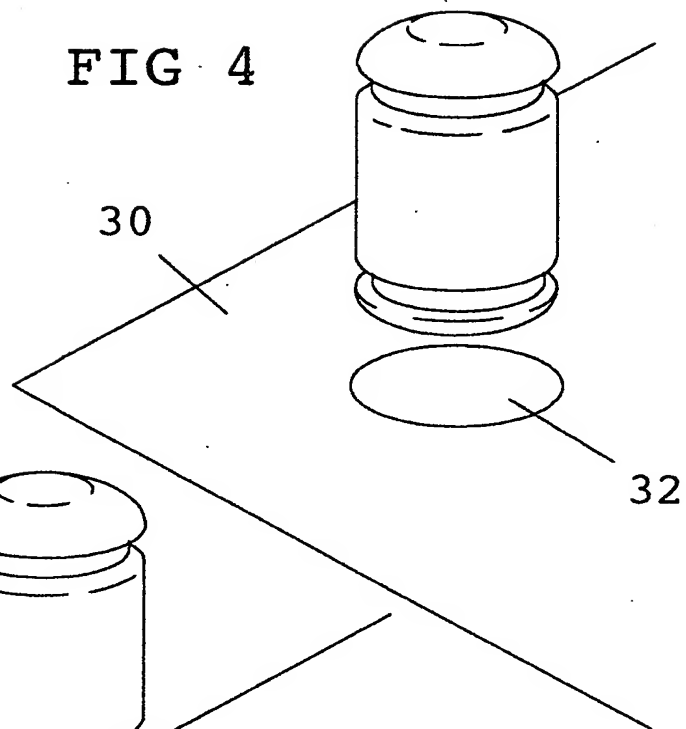